

LTX-WLR1 Remote Door Button & Receiver



Main Characteristic

Adopt uniformity frequency, high stability of wireless signal receiving and sending Solidification of PU varnished shell, dapper appearance with anti-off screw

Operation frequency 315M, stability better than 10-5.

Panel pushing with low-power consumption, long service life battery.

Three point of trigger pressing design to ensure the effective action.


With large capacity output, available to be used with autodoor, electric lock and access controller

Door open within 2s when signal received.

Wide voltage input of DC12

Function switch with voice indicator, power indicator turns green to confirm the validity of operation.

LTX-WLR1 Remote Door Button & Receiver

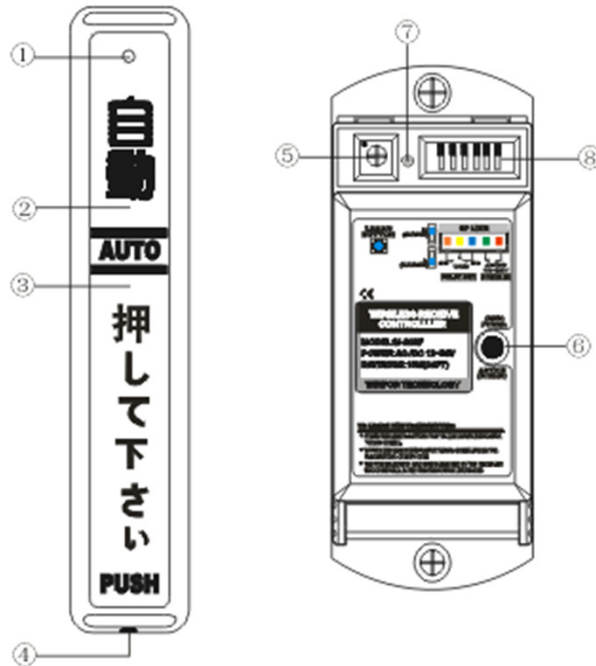

This product is with the function of coding self-learn. Make sure the code of remote transmitter has been learned into the receiver before using (16 kinds of codes can be learned)

Operation way: Press the learned button, indicator turns Green. Press any key of the remote transmitter. The transmitter has been learned by the receiver successfully with two flashes of green light appears.

Delete method: Press the learn button for 5S, turns on green light, all the codes has been deleted successfully(Can not delete one by one)

Power should be cut in case of the function switch(L-type and M-type). Otherwise, the receiver maintains the previous state.

- The launch indicator(When trigger effective turns red light)
 - Pushing panel
 - Dial switch placed inside, prevent the anti-interference by editing different signal code
 - Fixing screw
 - Learn button
 - Indicator(With red light when power is on, turn on green when signal received)
 - L-type and M-type available for chosen for the output state
- Binding post