


LB-700 A / B Electric Dropbolt



LB-700A

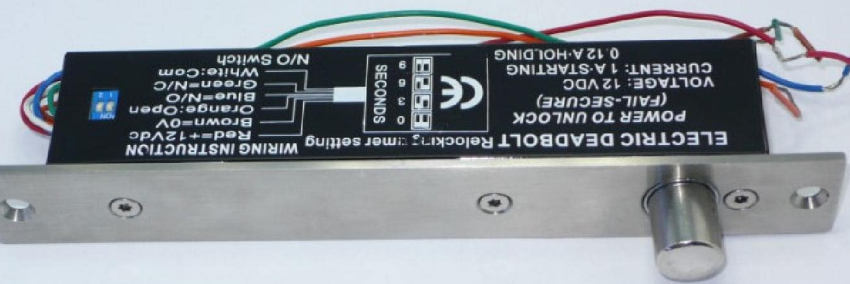

LB-700B



Technical Specifications :

Fail Safe:	Locked when energized (LB-700A)
Fail Secure:	Unlocked when energized (LB-700B)
Dimensions:	205L x 35W x 38H (mm)
Bolt:	17 mm DIA, Stainless steel 16 mm throw
Voltage:	DC 12V
Current:	Start Up : 950mA ; Stand By : 90mA
Suitable For:	Wooden door, Glass door, Metal door
Solid Bolt:	Polishing housing, 2000Kg Holding force
Function:	NC (LB-700A)/ NO(LB-700B), with Lock signal output
Relay Timer:	0, 3, 6, 9 sec
Induction Distance:	8 mm
Operating Temp:	-10~+25°C (14-131F)
Suitable Humidity:	0~90% (Non-condensing)
Face Plate Material:	Aluminium
Optional Bracket:	ABK-500, ABK-700
Weight:	1kgs