


## ES-750NC/ES-751NO Electric Strike

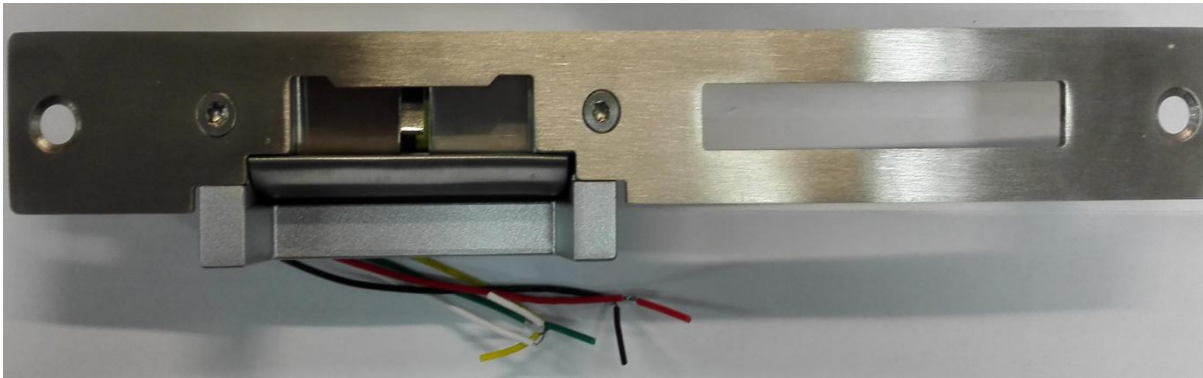

### Technical Specifications :

<b>Fail Safe:</b>	ES-750NC (Lock when energized)
<b>Fail Secure:</b>	ES-751NO (Unlock when energized)
<b>Dimensions:</b>	250L x 44W x 35H (mm)
<b>Holding Force:</b>	500kgs
<b>Signal Output:</b>	NO NC COM
<b>Voltage:</b>	DC 12V
<b>Current:</b>	320mA
<b>Suitable For:</b>	Wooden door , Metal door , PVC door
<b>Function:</b>	Built-out MOV
<b>Open Mode:</b>	90 Degrees Swinging door
<b>Operating Temp:</b>	-10~+55°C (14-131F)
<b>Surface Temp:</b>	Within +20°C
<b>Face Plate Material:</b>	Painted Steel
<b>Bolt Material:</b>	Stainless Steel
<b>Weight:</b>	0.42kg